


# LP33 Series UPS

Uninterruptible Power Supply

60/80/100/120 kVA three phase 400Vac

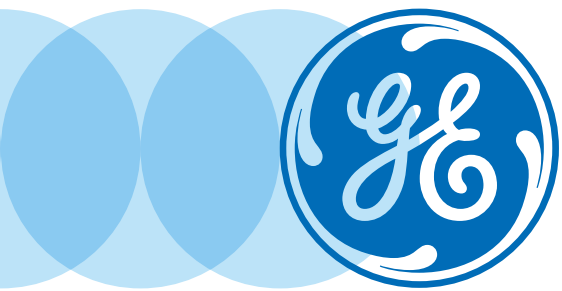


# UPS technology for the digital world

For more than a century, GE has led the way with innovative technologies and groundbreaking quality initiatives – literally helping to power the world. Along the way, through the development and delivery of state-of-the-art products and uncompromising service, GE has also built a legacy as a leading supplier of critical power solutions.

To bridge the gap between the traditional utility grid and the needs of today's business, GE offers a complete portfolio of critical power products and services. From desktop Uninterruptible Power Supply (UPS) units to engineered power systems and from basic UPS and battery maintenance to comprehensive service contracts, GE's portfolio covers every aspect of your power quality and delivery system.

At GE, our goal is simple – to never let power quality stand in the way of our customers' success. That's why GE is committed to continue developing and delivering UPS technology for the digital world.

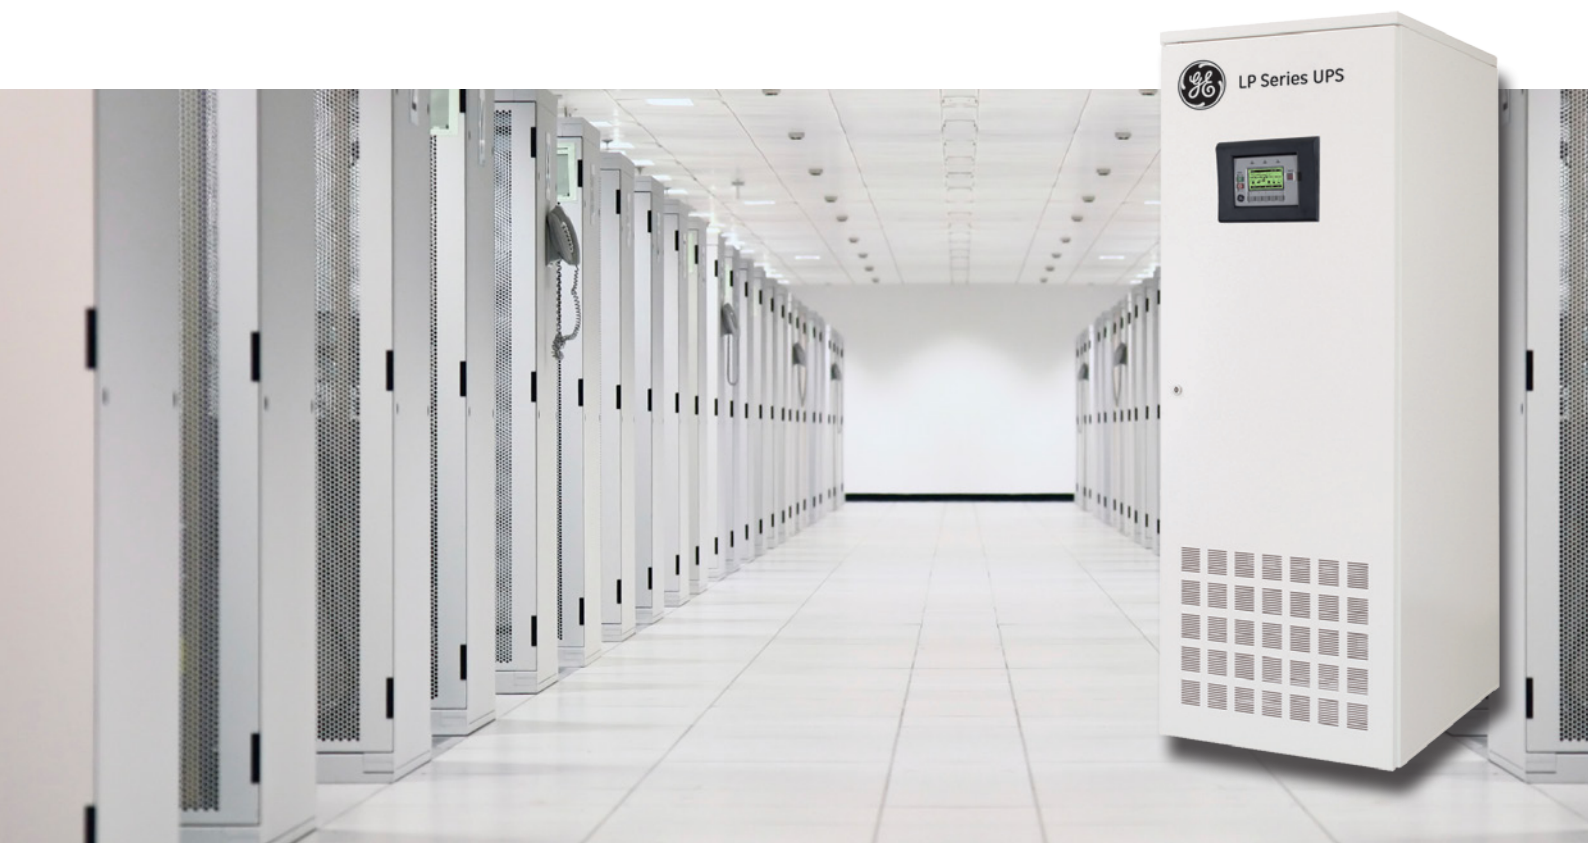

# The power of GE

GE is a diversified technology and services company dedicated to creating products that make life better from aircraft engines and power generation to financial services and medical imaging. GE operates in more than 100 countries and employs more than 307,000 people worldwide (2014).

The company traces its beginnings to Thomas A. Edison, who established Edison Electric Light Company in 1878. In 1892, a merger of Edison General Electric Company and Thomson-Houston Electric Company created General Electric Company. GE is the only company listed in the Dow Jones Industrial Index today that was also included in the original index in 1896.

GE is proud of its impressive track record for introducing leading edge products, accomplishing growth, having strategic customer relationships and a global presence as broad and expansive as its portfolio of products. GE is committed to maintaining a leadership position in all four of its company-wide initiatives (Six Sigma, Globalization, e-Business/Digitization and Services) to achieve maximum results, whilst embracing the values that are at the heart of the business - imagine, solve, build and lead.

# UPS Product Technology

GE is a leader in the field of critical power protection. It's UPS Product Technology business designs, manufactures and delivers premium power quality products and related software products that ensure organisations all over the world enjoy a safe and managed power supply.

Protect your critical power application with a GE UPS – ranging from 400VA to 6MVA. Using state of the art technology GE has developed different UPS with high reliability and maximum application flexibility.

With a GE power solution in place, your mission-critical equipment is protected from any fluctuation in your power source, enabling you to concentrate on your core activities. Leave your critical power needs with GE, a reliable power quality supplier for more than 100 years.

The GE LP33 Series is a highly reliable transformerless three phase UPS system providing critical power protection for a wide range of applications.

The LP33 Series is easy to install and service, optimised for the office environment. The robust design is also suitable for more traditional, industrial applications.

Both the power and reliability of the system can easily be expanded by adding units, creating a redundant system which has no single points of failure. This is achieved by utilising GE's unique Redundant Parallel Architecture™ (RPA™) technology.

Designed as a true VFI (Voltage and Frequency Independent) UPS, the LP Series is an on-line double conversion, intelligent and heavy duty UPS. The VFI concept ensures the highest level of protection, even under the toughest conditions.





## Features & benefits

- GE's clean input Active IGBT technology provides low input harmonics feedback distortion constant for all load levels from 20% to 100% load. This allows the user to save in the sizing of upfront UPS equipment: generator sets, cabling and circuit breakers. It also reduces the disturbance on nearby equipment without the need of additional filters. This technology provides a high input power factor, so utility companies will not charge users for apparent power usage.
- Input/Output terminals are easily accessible from the front, as are all other serviceable parts. True front access provides the possibility to place the unit against a wall or in a 'back to back' configuration, saving floor space for other customer equipment (i.e data center,...) and reducing repair time.
- EMC class A filters available in the UPS, ensuring the reduction of interference with other equipment supported in the application (telecom, broadcasting,...). This protects the quality of the customer application equipment, for example with images from a medical scanner in healthcare application. Other UPS without the EMC filters could cause interference leading to a distorted image.
- The low footprint of the LP33 Series is best in class and provides the user with more space for other equipments. Combined with its low weight, it can be easily handled, reducing installation time and costs.
- The output dynamic stiffness characteristic of the unit is particularly suitable in healthcare application where no voltage distortion with non-linear load and no voltage variation with load steps are required. This enhances the user's medical equipment productivity and the quality of application, increasing uptime and MTBF of customer equipment while limiting the need for maintenance intervention.



## Superior battery management

- Automatic battery test, prevents "surprises"
  - Battery calibration test, enables tracking of battery aging
  - Temperature compensation, prevents overcharging
  - Load dependent end-of-discharge voltage and no load shutdown prevents deep discharge of batteries
- No surprises  
- Prevents damage  
- Extends life time of batteries

## Options

- SNMP plug in card for integration into networks
- Potential free alarm contacts
- Matching battery packs for extended back up times
- Redundant Parallel Architecture™

## Full functionality

- Multi-language LCD, easy to use
- Excellent overload behaviour, withstands toughest conditions
- Cold start function (start-up without mains present)
- Manual bypass integrated in UPS
- Equipped with RS232 serial port
- Fits well in office environment
- Frequency converter

## Applications

- Computer and data centers
- Call centres
- Manufacturing and process control units
- Medical equipment and healthcare facilities
- Transportation infrastructure
- Security systems
- Financial institutions
- Fixed and mobile voice and data transmission



## RPA™ Redundant Parallel Architecture™

GE provides a unique technology called Redundant Parallel Architecture (RPA) that can parallel Uninterruptible Power Supply (UPS) modules with true redundancy. With RPA, there is no need for external electronics or switches to control the UPS modules in the parallel system. One of the UPS modules in the system arbitrarily takes a leadership role, while the other UPS modules have access to all control parameters. If one UPS fails to operate, the load is automatically redistributed among the others. If the lead UPS fails to operate then a different UPS automatically takes on the leadership role. The RPA systems are designed to have no single points of failure, ensuring the highest level of power protection for critical loads.



Many other so-called redundant UPS offerings have one critical shortfall, in that they have critical components that are not redundant. RPA technology provides complete redundancy of all critical components and there are no single points of failure. RPA technology allows UPS system expansion not only to increase capacity but also to improve the reliability of the power provided to critical loads. For mission critical applications, RPA technology provides true redundancy for the highest reliability.

- **RPA Configuration** provides complete redundancy of all critical components and allows paralleling of up to four units for increased load capacity. It ensures excellent dynamic behaviour based on output voltage load sharing. This provides the highest reliability and availability for mission-critical applications
- **Parallel Architecture** allows for system upgrades to meet future power needs without any interruption to the critical load or transfer to bypass
- **Easy to install and maintain**
- **Scaleable design** allows for **efficient use of capital**
- **Peer-to-Peer architecture** where any UPS can be the “logic leader” ensuring **no single points of failure**





## Data protection software and connectivity solutions

GE's UPS come standard with two software packages: UPSMAN and RCCMD.

UPSMAN is a complete protection software providing a graphical interface for monitoring the UPS. It communicates with the UPS via the standard RS232 interface or via an optional SNMP plug-in card. If the UPS is not able to supply the required power the software enables the computer on which it is installed to shutdown gracefully in order to avoid data corruption. UPSMAN can also act as a "master computer" which can send remote shutdown commands to multiple remote computers/servers in case of a UPS failure. These remote computers/servers, centrally controlled by a computer running UPSMAN, need to run on their turn the light software package named RCCMD.


### UPSMAN - Description

- Data Protection Software
- Supports RS232 & SNMP communication
- Free software license
- Written in native language
- Supports most popular OS, including virtualization

### RCCMD - Description


- Light background protection software
- Native solution for more than 35 OS
- React on shutdown commands

As an alternative for the solution above, with a "master computer" controlling multiple remote computers in a network, the UPS can be equipped with an SNMP card. This card sends the required remote shutdown commands directly to the remote network computers, which again all run the software RCCMD.

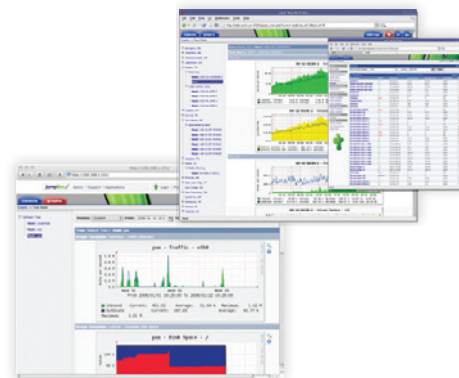

GE's iUPSGuard is a remote monitoring solution for UPS, providing status monitoring and alarm notification that supports all GE UPS product lines, anytime, anywhere. iUPSGuard provides current and detailed information about UPS operation, including its configuration, internal alarms, automatic reporting and operating conditions over the web.

- Highly secure and efficient data transmission
- SSL encrypted unidirectional communication
- Firewall friendly – no changes required to firewall settings or proxy servers providing easy deployment and addressing compliance objectives
- Supports various communications including IP and GPRS

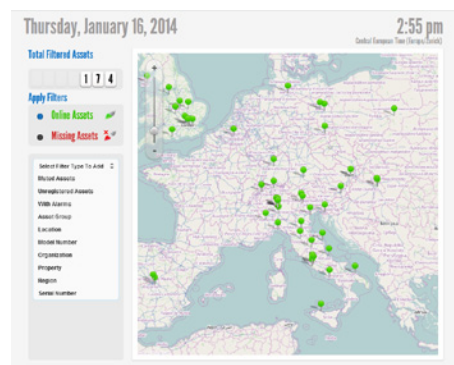

# Technical specifications

Topology	: VFI (Voltage Frequency Independent) according to EN 62040-3
Technology	: Active IGBT Rectifier technology
Operating Modes	: Double conversion, automatic bypass, ECO mode, frequency converter and parallel operation up to 4 units

Model	LP 60-33	LP 80-33	LP 100-33	LP 120-33
Output power rating (kVA) (at PF = 0.6-0.8 lagging)	60	80	100	120
Output power rating (kW)	48	64	80	96
Output power factor	0.8			
Dimensions (w x d x h, mm)	600x745x1815		720x745x1815	
Weight (kg)	275	300	370	375
Audible noise	<67 db(A)		<70 db(A)	
Efficiency	93%			
Efficiency on ECO Mode	99%			
Protection degree	IP20 (IEC 60529)			
Input voltage range	323 - 460 Vac			
Input frequency range	50/60 Hz +/- 10%			
Input power factor	0.98 lag.			
Input current THD	< 9%			
Output voltage	3x380/400/415Vac, user selectable			
Output frequency	50/60 Hz +/- 0.1%			
Output voltage THD at linear load	< 1%			
Output voltage THD at non-linear load	< 2.5%			
Output voltage regulation static	< +/-1%			
Output voltage regulation dynamic (100% step load)	< +/-1% (recovery time < 3ms)			
Overload capability on inverter	125% 10 min., 150% 1 min.			
Batteries	40 blocks of 12V, common battery in parallel system optional			
Ambient operating temperature	0 - 40 °C			
Colour	RAL 9003, white			
Safety standards	EN 62040-1 / EN 60950 / IEC 60950			
Safety	backfeed protection standard included			
EMC standards	EN 50091-2 Class A, EN/IEC 62040-2 Cat. C2			
Interfacing	RS232; 4 alarm contacts, SNMP interface (optional)			

Specifications subject to change without prior notice



**QUITO: Elia Liut N45-26 y Edmundo Chiriboga Telf: 02 3936 400 CELULAR: 09 9610 8549**  
**GUAYAQUIL: Vernaza Norte Mz. 13 Solar 22 Telf: 04 2596 400 CELULAR: 09 8929 9999**  
**CUENCA: Luis Moscoso s/n y Manuel Ignacio Ochoa Telf: 07 2854 045 CELULAR: 09 9570 0700**

